



DS-781

Price Computing & Check-Out Scale

Green Scale , Save Environment

Extremely Low Power Consumption
Reliable & Compact Design
High Contrast LCD Display (DS-781)
Stainless Steel Flat Platter



DS-781P




DS-781B


*Searching for
a New Balance*

External Dimensions(mm)

DS-781B

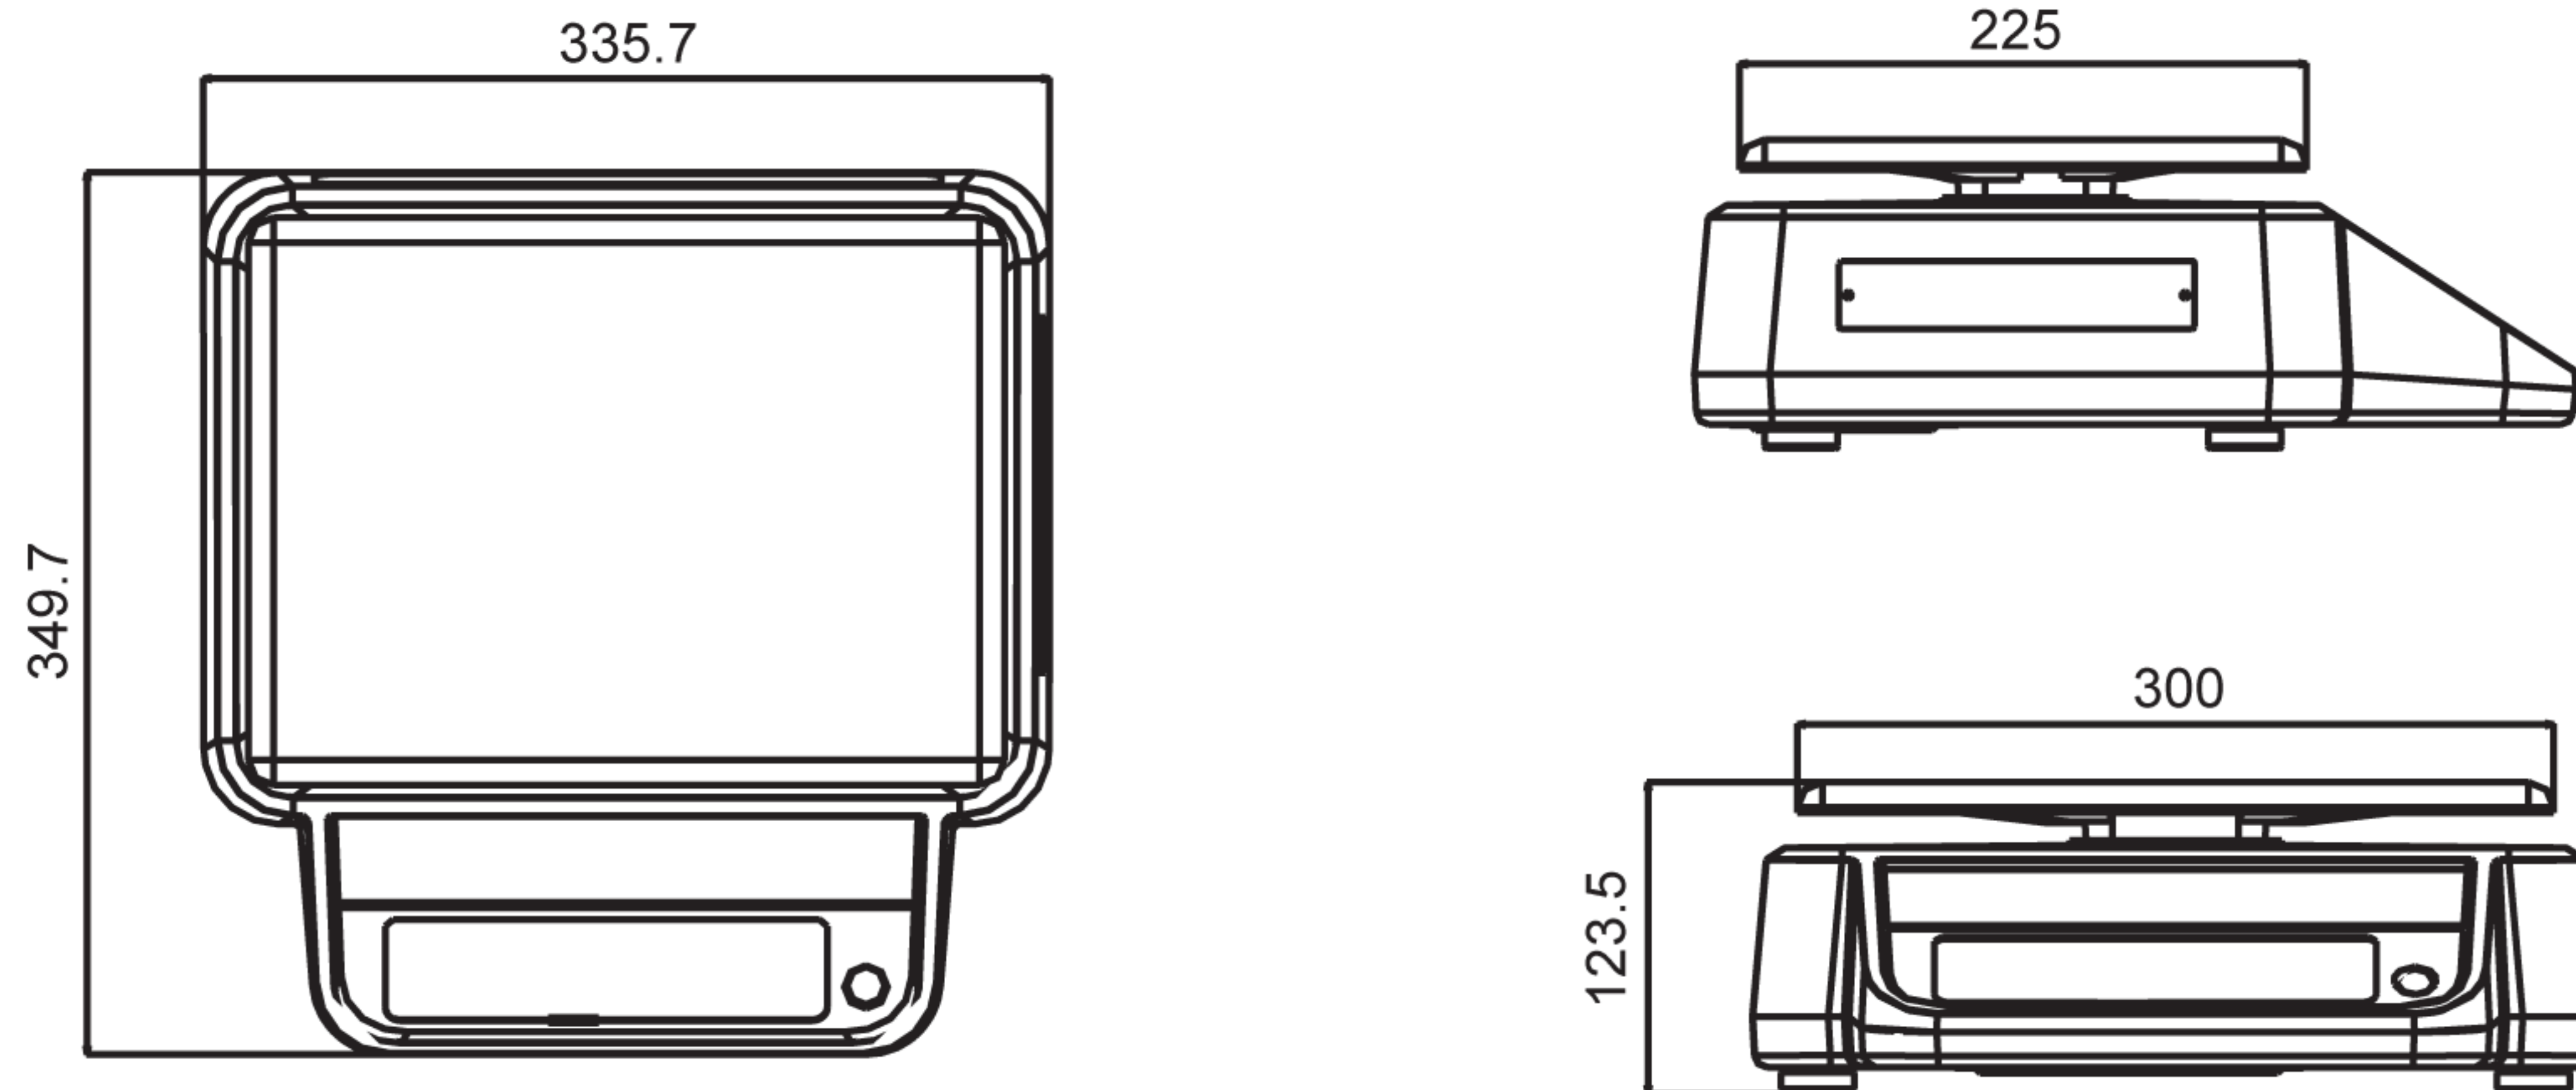

DS-781P

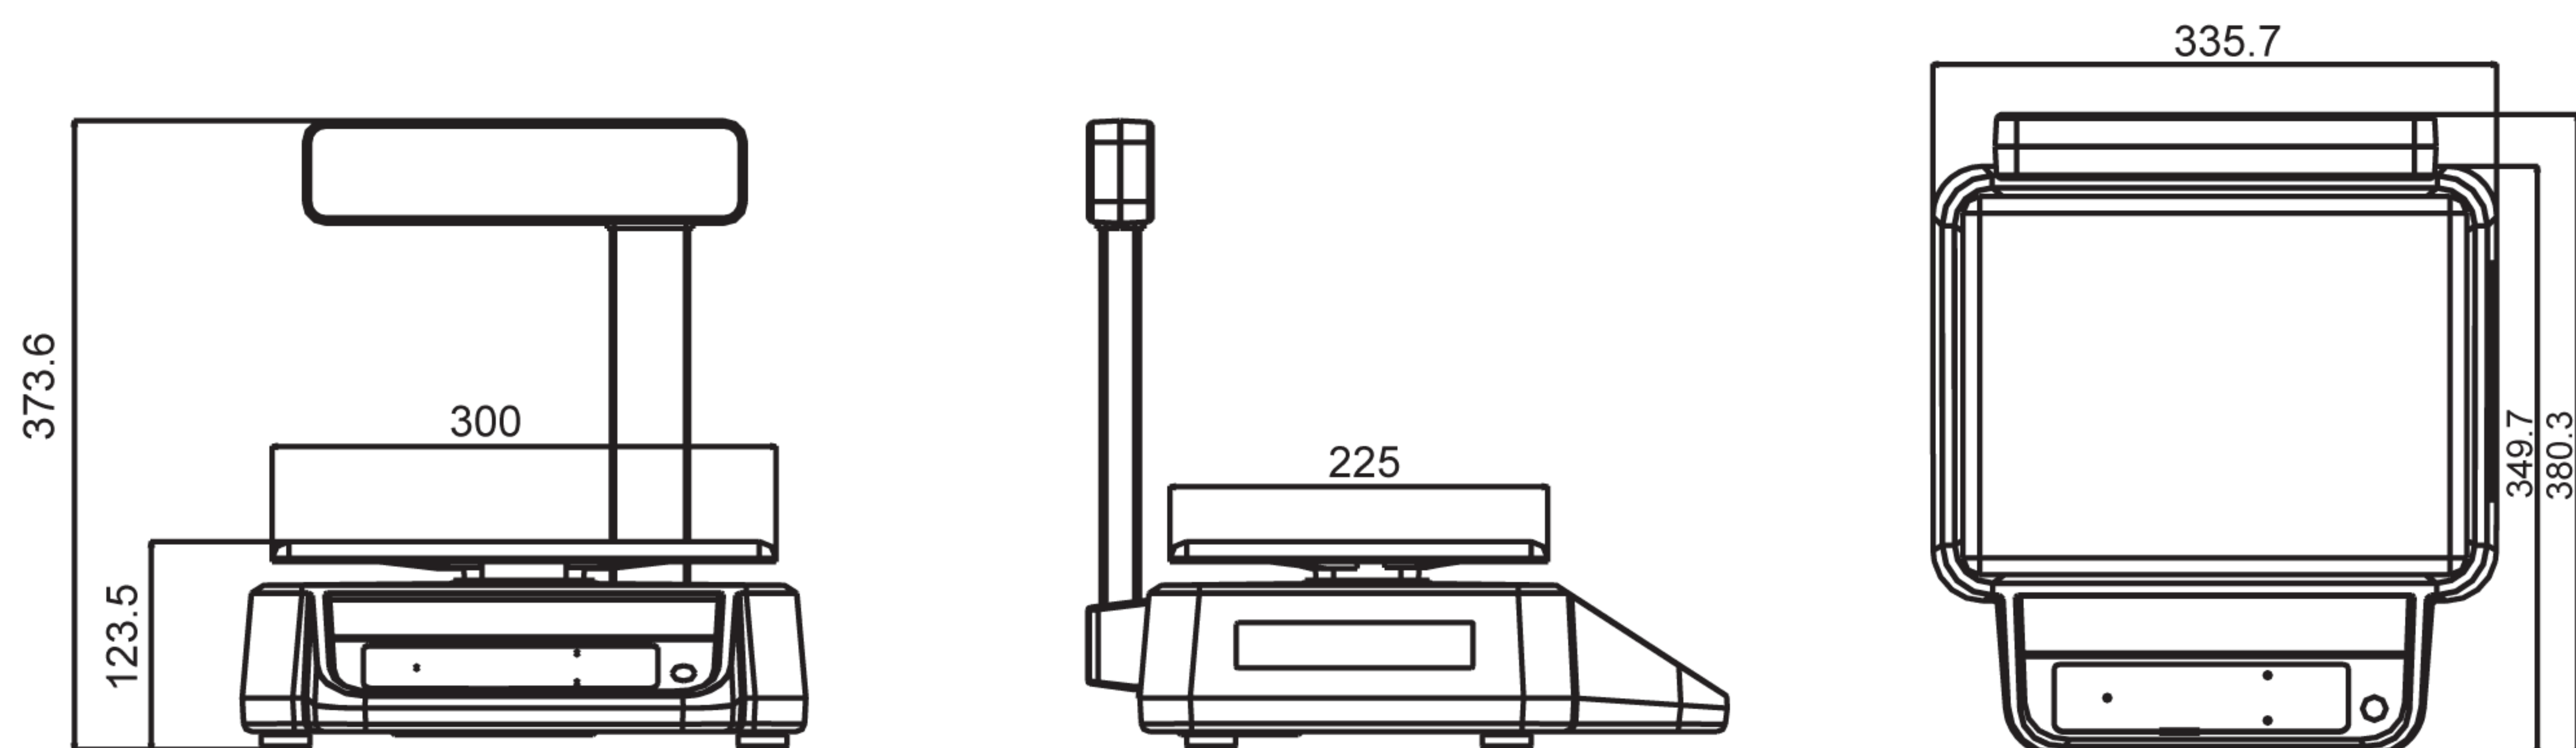

Basic Specifications

Model	DS-781B	DS-781P
Capacity	3kg, 6kg, 15kg, 30kg, 6lb, 15lb, 30lb and 60lb	
Power Source	AC: Adapter(DC 5V ~ 8V, 100mA) DC: 4 x C size dry battery or AC/DC	
High Contrast LCD	YES	
Resolution	1/3,000	
RS-232C Interface	Optional	
Operating Temperature	-10°C ~ +40°C	
Operating Humidity	15~85%RH	
Power Consumption	AC: 0.12W when using dry battery DC: 0.24W when DC 6V	

NTEP Approved, COC #10-009

New Brunswick International, Inc.

NJ - 76 Veronica Avenue, Somerset, NJ 08873

Tel: (732) 828-3633, Fax: (732) 828-4884

CA - 530 West Central Avenue, Suite C, Brea, CA 92821

Tel: (714) 671-7911, Fax: (714) 671-0798